

Permanent Split Capacitor Commercial Condenser Fan Open Dripproof & Totally Enclosed, Air Over

APPLICATIONS:

For use on condenser cooling fans in commercial air conditioning applications.

FEATURES:

- Capacitor & Outlet Box Included, unless noted
- Reversible Rotation
- Double-Sealed Ball Bearing
- Continuous Duty, Air Over
- 60°C Ambient
- Dual Voltage
- Class B insulation
- Discount Symbol: DS-3HAC


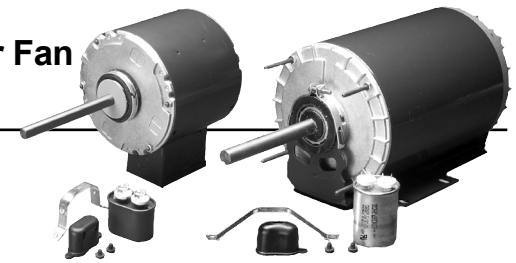


Figure A




Figure B

5.6" Diameter, All Angle Mounting, Hub Ring Mount (2-1/4") (Figure A)

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt. (lbs)	Notes	OEM
1/3	1075	208-230/460	6727	\$287	Ball	5.0	2.4/1.2	5.0	5.9	5.3	11.4	N/A	17		
1/2	1075	208-230/460	7475	\$366	Ball	10.0	2.8/1.4	5.0	6.4	5.8	11.9	N/A	20		
	1075	208-230/460	2201	\$413	Ball	10.0	3.2	5.0	7.4	6.8	12.8	N/A	20	67	
	1075	208-230	8868	\$241	Ball	10.0	3.8-2.5	3.0	--	6.3	9.3	0.63	21	H15,H44	
3/4	1075	208-230/460	2202	\$404	Ball	12.5	4.8	5.0	8.4	7.8	13.8	N/A	23	66,67	
	1075	208-230/460	6603	\$428	Ball	7.5	5.0/2.5	5.0	6.9	6.3	12.4	N/A	22	66,H16	
	1075	208-230/460	5489	\$428	Ball	7.5	5.0/2.5	5.0	6.9	6.3	12.3	N/A	22	65,66,H15	
	1100	460	8233	\$313	Ball	12.5	2.3	3.0	6.6	6.0	10.2	N/A	19	65,66,H15	AA
1	1080	460	8055	\$532	Ball	15.0	2.5	5.0	--	6.6	11.6	N/A	20	H16,H29	LE

6.3" Diameter, All Angle Mounting, Hub or Stud Mount (4) (Figure A with 5/8" shaft)

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt. (lbs)	Notes	OEM
1/2	825	208-230	3568	\$482	Ball	10.0	3.6	6.0	7.0	6.0	13.4	1.5	25	65,66,H15	
3/4	1075	208-230	3566	\$516	Ball	15.0	3.8	6.0	7.0	6.0	13.4	1.5	26	65,66,H15	
	825	208/230	3567	\$563	Ball	17.5	5.3	6.0	8.2	7.8	14.6	1.5	32	65,66,H15	
1	1075	208-230	3565	\$458	Ball	17.5	5.2	6.0	7.5	6.5	13.9	1.5	30	65,66,H15	
	1075	208-230/460	2203	\$455	Ball	17.5	5.2/2.6	6.0	10.4	9.9	16.9	1.5	40	67	
	1075	208-230/460	8431	\$428	Ball	12.5	5.8-5.4/2.7	6.0	9.9	9.4	16.4	1.8	41	65,67	
1 1/2	1075	208-230/460	2204	\$472	Ball	20.0	7.6/3.8	6.0	10.9	10.3	16.9	1.5	43	67	

6.3" Diameter, Resilient Base (Figure B)

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt. (lbs)	Notes	OEM
3/4	1100	208-230/460	*2193	\$728	Ball	30.0	4.8/2.5	4.1	8.3	7.8	13.1	--	41	H15,H16	
1	1075	208-230/460	2686	\$569	Ball	17.5	5.1/2.6	5.0	10.5	9.3	15.8	1.5	38	68	
1 1/2	1075	208-230/460	2896	\$609	Ball	20.0	7.5/3.8	5.0	11.0	9.8	16.3	1.5	47	67,68	

AA = Aaron®† LE = Lennox®†

*440V Capacitor

- Note 65 Ventilated (in wet applications, position vent holes at bottom of motor; use rain shield if mounted shaft up)
 Note 66 No outlet box, Includes leads
 Note 67 Capacitor not included, internal conduit box
 Note 68 Quick Change Voltage Receptacle, no outlet box

- Note H15 Capacitor not included
 Note H16 CCWLE rotation only
 Note H29 Includes rain shield, shaft up mounting
 Note H44 Stud mount

† All marks shown within this document are properties of their respective owners.

