


## Three Phase Commercial Belt-Drive Blower Motor Open Dripproof, Air Over Not Required

### APPLICATIONS:

To meet manufacturer's requirements for belt-drive blowers in commercial air conditioning applications where 3 phase power is required.

### FEATURES:

- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- Continuous Duty
- Double Contact Sealed Ball Bearings
- Dual Voltage
- Class B Insulation
- 104°F (40°C) Ambient Rated
- Discount Symbol: DS-3HAC

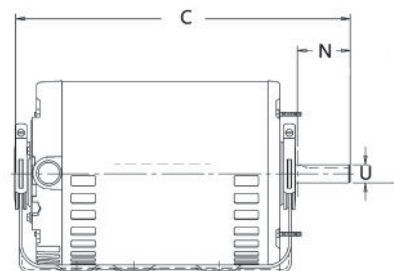

### Rigid Base Mount

| HP    | RPM  | Voltage     | Catalog Number | List  | Bearings | NEMA <sup>®†</sup> Frame | Amps        | Shaft N | Shaft U | SF   | Total C | Ship Wt. (lbs) | Notes | OEM |
|-------|------|-------------|----------------|-------|----------|--------------------------|-------------|---------|---------|------|---------|----------------|-------|-----|
| 1     | 1725 | 208-230/460 | 1813P          | \$517 | Ball     | 56H                      | 3.1-3.0/1.5 | 1.9     | 0.625   | 1.15 | 12.4    | 30             | VC    |     |
| 1 1/2 | 1725 | 575         | 1197           | \$383 | Ball     | 56HZ                     | 2.0         | 2.3     | 0.875   | 1.15 | 12.3    | 36             |       |     |
|       | 1725 | 208-230/460 | 1814P          | \$584 | Ball     | 56H                      | 4.8-4.8/2.4 | 1.9     | 0.625   | 1.15 | 12.8    | 34             | VC    |     |
|       | 1725 | 200-230/460 | 7913VP         | \$704 | Ball     | 56HZ                     | 4.8/2.4     | 2.3     | 0.875   | 1.15 | 12.9    | 36             |       |     |
| 2     | 1725 | 208-230/460 | 1815P          | \$637 | Ball     | 56H                      | 6.0-6.2/3.1 | 1.9     | 0.625   | 1.15 | 12.8    | 34             | VC    |     |
|       | 1725 | 200-230/460 | 7914P          | \$620 | Ball     | 56HZ                     | 7.6-7.8/3.9 | 2.3     | 0.875   | 1.15 | 12.3    | 37             |       |     |
|       | 1725 | 575         | 1088           | \$435 | Ball     | 56HZ                     | 2.9         | 2.3     | 0.875   | 1.15 | 12.2    | 34             |       | LE  |
| 3     | 1725 | 200-230/460 | 7915VP         | \$766 | Ball     | 56HZ                     | 9.0-9.2/4.6 | 2.3     | 0.875   | 1.15 | 12.3    | 45             |       |     |
|       | 1725 | 575         | 1089           | \$669 | Ball     | 56HZ                     | 3.4         | 2.3     | 0.875   | 1.15 | 13.2    | 48             |       |     |

### Resilient Mount

| HP    | RPM  | Voltage     | Catalog Number | List  | Bearings | NEMA <sup>®†</sup> Frame | Amps         | Shaft N | Shaft U | SF   | Total C | Ship Wt. (lbs) | Notes | OEM |
|-------|------|-------------|----------------|-------|----------|--------------------------|--------------|---------|---------|------|---------|----------------|-------|-----|
| 1/2   | 1725 | 208-230/460 | 8488           | \$501 | Ball     | 56                       | 2.0-1.9/0.95 | 1.9     | 0.625   | 1.25 | 10.3    | 20             |       |     |
| 3/4   | 1725 | 208-230/460 | 8489           | \$550 | Ball     | 56                       | 2.9-2.9/1.5  | 1.9     | 0.625   | 1.25 | 10.8    | 22             |       |     |
| 1     | 1725 | 208-230/460 | 8498           | \$618 | Ball     | 56H                      | 4.3/2.2      | 1.9     | 0.625   | 1.25 | 11.3    | 26             |       |     |
| 1 1/2 | 1725 | 200-230/460 | 8490P          | \$700 | Ball     | 56H                      | 5.2-5.1/2.6  | 1.9     | 0.625   | 1.15 | 12.8    | 40             |       |     |
| 2     | 1725 | 208-230/460 | 8493P          | \$803 | Ball     | 56H                      | 6.1-6.3/3.1  | 1.9     | 0.625   | 1.15 | 12.8    | 26             |       |     |

LE = Lennox<sup>®†</sup>

Note VC Quick Change Voltage Device