

Three Phase Commercial Condenser Fan Open Drip Proof, Air Over




APPLICATIONS:

Designed to meet manufacturer's requirements for condenser cooling fans in commercial air conditioning applications where 3 phase power is required.

FEATURES:

- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- Continuous Duty, Air Over
- Double-Sealed Ball Bearings
- Dual Voltage
- Class B Insulation
- 140°F (60°C) Ambient Rated
- Shaft-up Mounting

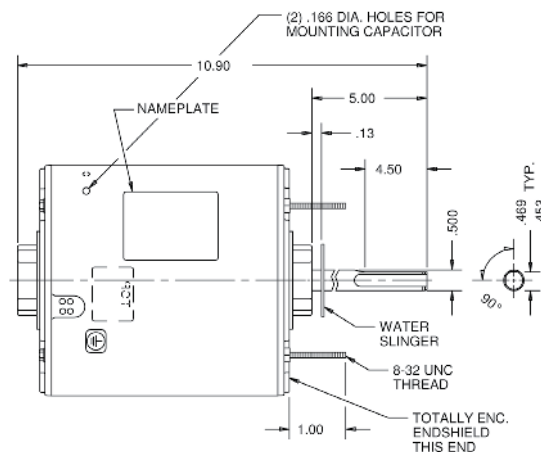

Belly Band Mount, Flat and Keyway on Shaft

HP	RPM/ Spds	Voltage	Catalog Number	NEMA Frame	Amps	Shaft N	Total C	Shaft Diameter	Ship Wt.	Notes	OEM	List
1/2	1140/1	575	4940	56YZ	.85	3.3	13.4	0.625	21.0			\$324
	575/1	208-230/460	1260	56YZ	3.2-3.1/1.6	3.6	14.4	0.625	21.4	98		\$500
3/4	1140/1	575	4958	56YZ	1.2	6.0	14.8	0.625	27.0			\$383
1	1140/1	575	4933	56YZ	1.6	6.0	16.2	0.625	36.3			\$383
	1140	200-230/460	1816	56YZ	6.0/3.0	3.0	13.6	0.625	35.0		CA	\$417
	1140	200-230/460	1326	48YZ	3.5-3.3/1.7	5.0	14.5	0.500	19.0		DB	\$485
	1140	200-230/460	8058	56YZ	3.6/1.8	3.4	13.7	0.625	30.0		LE	\$462
	1140/1	575	1158	48Y	1.4	5.5	13.1	0.625	21.0			\$515
	1100/1	575	1266	48Y	1.4	3	12	0.500	19.0			\$265
1 1/2	1140/1	575	4934	56YZ	2.3	6.0	16.3	0.625	39.0			\$412
	830/1	208-230/460	1219	56YZ	6.6-3.3	3.5	14.2	0.625	54.0			\$540
2	1140/1	575	1184	56YZ	2.8	6.0	16.8	0.625	40.0			\$574

CA = Carrier DB = Dunham Bush LE = Lennox

Rigid Base Mount, Flat and Keyway on Shaft

HP	RPM	Voltage	Catalog Number	NEMA Frame	Amps	Shaft N	Total C	Shaft Dia.	Ship Wt.	Notes	OEM	List
3/4	1140	208-230/460	3913	56Y	3.5/1.7	3.0	12.2	0.625	32.0	98		\$560
1	1140/1	575	4936	56Z	1.5	3.2	14.5	0.625	23.0			\$427
2	1140/1	575	1140	56HZ	2.8	6.0	16.8	0.625	44.2			\$604

Flex Mount Mount, Flat on Shaft

HP	RPM/ Spds	Voltage	Catalog Number	NEMA Frame	Amps	Shaft N	Total C	Shaft Dia.	Ship Wt.	Notes	OEM	List
1/3	1400	380/460	2387	48Y	1	2.0	10.4	0.500	17	98		\$536