




SEER¹¹

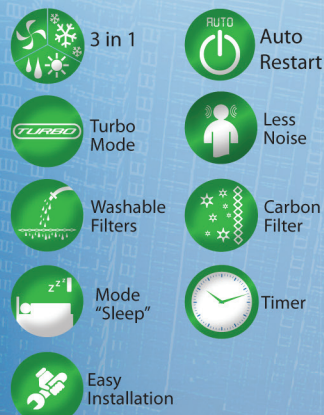

- 4 wheels 360 to allow transfer unit from room to room
- Easy installation
- Washable filters
- Ideal for cooling spaces that do not allow the installation of equipment with pipes
- Ventilation system to remove hot air
- Suitable for small spaces
- Ideal for spaces rented
- The comfort temperature for humans it is between 21 °C and 23 °C / 69 °F and 73 °F

60Hz



Model	EPOR012C10A	
Power supply	Ph / V / Hz	1PH / 115V / 60Hz
Cooling		
Capacity	Btu/h	12000
Input	W	1355
Current	A	11.8
EER	W/W	2.6
	Btu/W.h	8.9
Compressor		
Type		ROTARY
Capacity	Btu/h	10764
Input	W	1040
Rated current (RLA)	A	9.3
Locked rotor Amp (LRA)	A	48.8
Thermal protector		B440-135-141E
Thermal protector position		EXTERNAL
Capacitor	uF	55
Refrigerant oil / Charge	ml	ESTER OIL VG74/350
Starting current	A	48.8
Indoor side fan motor		
Input	W	73/68.5/64.5
Capacitor	uF	4
Speed (hi/mi/lo)	r/min	920/860/800
Indoor side air flow	m ³ /h	450
	CFM	265
Indoor side noise level (Hi)	dB(A)	54
Outdoor side fan motor		
Input	W	124/58.8
Capacitor	uF	6
Speed (Low/Hi)	r/min	1200/755
Outdoor side noise level (Hi)	dB(A)	59
Other Specifications		
Refrigerant type / charge	Oz	R410A/13.01
Design pressure	PSIG	550/340
Plug type		14#x3/LCDI
Plug Face (NEMA#)		5-15P
Power Cord Length	mm	2300
	ft	7.54
Control type		Remote Control
Operation temp (room temp.)	°C	17-35/---
	°F	62-95/---
Application area (Cooling Standard)	m ²	16-23
	sq.ft	172-247
Application area (Cooling EPA)	sq.ft	450-550
Dimension (WxDxH)	mm	454x365x700
	in	17.9x14.4x27.6
Packing (WxDxH)	mm	489x403x880
	in	19.3x15.9x34.6
Net/Gross weight	Kg	29.9/33.7
	Lb	65.8/74
Loading quantity 20' / 40' / 40'HQ	Pieces	132/274/403



3 in 1



Auto Restart



Washable Filters



Carbon Filter



Turbo Mode



Less Noise




Mode "Sleep"



Easy Installation



Timer



Includes:

- Power Cord
- Drain Hose
- Exhaust Duct
- Foam Seal
- Wheels for Easy Mobility
- Window Slider Kit and bolt
- Remote Control (includes two(2) AAA 1.5 V batteries)

* The wire gauge is factory recommended, please refer to the appropriate local code to select the wire size

* All dimensions and performance rates could change, please contact ECOX for the latest information available

