

Sensor SB-59


DESCRIPTION:

Temperature sensor with silicone cable and covered for a stainless steel shell. It operates in temperatures that range from -50°C to 200°C (-58°F to 392°F).

COMPATIBLE INSTRUMENTS:

- TC-900 E Power (3rd Sensor)
- TC-900 E Log (3rd Sensor)
- MT-512 E 2HP
- MT-512 E Log
- MT-543 E Plus
- MT-543 E Log
- MT-516 E
- MT-519 E
- TIC-17 RGTi
- TI-44 E plus
- Anasol
- Microsol E
- Microsol Advanced Line
- Microsol E II plus
- Microsol II power
- RT-607E plus

DIMENSIONS*:

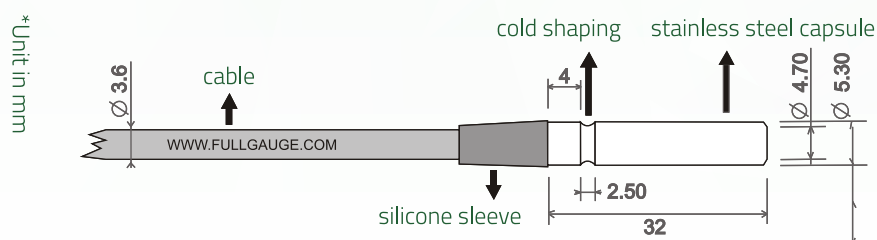

CABLE COLOR:
White

CAPSULE TYPE:
Stainless steel

MORE INFORMATION:

- **NTC:** Resistance of 10K Ohms at 77°F
- **Temperature range:** -50°C to 200°C (-58°F to 392°F)
- **Precision Full Scale P. F. S.:** 1% FS
- **Response time:** Less than 10 seconds. Test in water according to IEC 751. Time to reach 63.2% of the temperature step.
- **Tensile test:** $P_{\text{max}} = 4\text{kgf}$

FULL GAUGE'S TIP

The accessories that will simplify your installation.



CONTACT OUR SALES TEAM FOR MORE INFORMATION.



www.fullgauge.com
comex@fullgauge.com